


TÜRCERT TEKNİK KONTROL VE BELGELENDİRME A.Ş.







Overall Rating:

Class B1

Report No:

2022100863-R1

Applicant:

ADO- GOLDKANTE GMBH & CO. KG

Contact Person:

Lutz NEUBERT

Contact Telephone:

0049 6171 632 158

Contact e-mail:

Ineubert@ado-goldkante.de

Sample Accepted on:

02.08.2022

Report Date:

10.08.2022

Total number of pages:

7 (Pg)

Sample ID:

Art No: 1053 FR

	TEST	METHOD	RESULT
*	Fire behaviour of building materials and elements Part 1:	DIN 4400 4	PASS
	Classification of building materials Requirements and testing	DIN 4102-1	B1



Seal

K.rvefi

Customer Representative Merve Nur KIRVELİ

Laboratory Manager

Merve ÖZLÜ







TÜRCERT TEKNİK KONTROL VE BELGELENDİRME A.Ş.

It is prohibited to change any and all versions of this document in any manner whatsoever. In case of a conflict between the electronic version (e.g. PDF file) and the original paper version provided by TÜRCERT, the latter will prevail.

TÜRCERT Teknik Kontrol ve Belgelendirme A.Ş. disclaim liability for any direct, indirect, consequential or incidental damages that may result from the use of the information or data, or from the inability to use the information or data contained in this document.

The contents of this report may only be transmitted to third parties in its entirety and provided with the copyright notice, prohibition to change, electronic versions' validity notice and disclaimer.

Environment

The requirements and standards apply to equipment intended for use in

X	Residential (domestic) environment
Х	Commercial and light-industrial environment
X	Industrial environment
Х	Medical environment





TÜRCERT TEKNİK KONTROL VE BELGELENDİRME A.Ş.



DIN 4102-1

Scope

The standard applies to the classification of the fire behavior of building materials to assess the risk as a single building material and in combination with other building materials.

Building Material Classes

The building materials are classified according to their fire behavior into the building material classes according to Table 1:

Building Material Classes	Building Inspectorate Designation	
Α	Non-combustible building materials	
A1		
A2		
В	Flammable building materials	
B1	Flame retardant building materials	
B2	Normally flammable building materials	
В3	Easilly flammable building materials	

Building material class B1

General requirements:

- a) Building materials with the exception of outer wall cladding and floor coverings The test represents a model of the fire of an object in a room (eg waste paper basket in a corner of the room) Under this stress, the fire spread must not extend significantly outside the primary fire area and the heat emission must be limited.
- b) Exterior wall cladding The test is a model of the flames emerging from a wall opening. Under this load, the spread of fire must not extend significantly outside the primary fire area.
- c) Floor coverings The test represents a model of a fire situation in which flames strike from the door opening to an adjacent room. Under this load, the horizontal flame spread and the smoke development must be harmless.

Requirements for classification

Building materials, with the exception of floor coverings, meet the requirements for classification in building material class B1 if they pass the fire pit test and meet the requirements for building material class B2.









RESULTS

Art No: 1053 FR

	Results of the Numune	test (part 1)	
Row -No	Egil type.	Measurements test specimen	
	Foil-type:	Art No: 1053 FR	
1	No. of test specimen arrangement according to DIN 4102, part 15, table 1		
2	Max. flame height above bottom edge cm	0.3	
	Time 1) min: s	0:1	
4	Melt through / burn through Time ¹⁾ min : s	0:2	
5	Observations on the backside of the specimens Flames/smouldering Time 1) min: s Discolouration		
	Time 1) min : s	x	
7	Burning droplets Start 1) min: s	x	
8 9	Extent sporadic burning droplets continually falling particles	x	
10	Falling particles which burns Start 1) min: s	х	
11	sporadic falling parts	X	
12	continually falling particles		
13	Duration of the burning on the screen bottom (max.) min: s		
14	Interference of the burner flame by dripping /falling particles Time 1) min : s		
15	Early termination of the test End of burning at the specimen ¹⁾ min : s		
16	Time of early cancellation of the test ¹⁾ min : s		







TÜRCERT TEKNİK KONTROL VE BELGELENDİRME A.Ş.

	Results of the Numune (p	art 2)	
Row -no.		Measurements Test Specimen	
		Art No: 1053 FR	
	Continuous burning after termination of the test		
17	Duration min : s		
18	Number of specimens		
19	Front side of the specimen		
20	Back side of the specimen		
21	Flame length cm		
	Smouldering after termination of the test		
22	Duration min : s	_	
23	Number of specimens		
	Location		
24	Lower half of the specimens	_	
25	Upper half of the specimens		
26	Front side of the specimen		
27	Backside of the specimen		
	Smoke development		
28	≤ 400 % x min	x	
29	> 400 % x min		
30	Diagram in appendix		
24	Residual lengths		
31	Single values cm		
32	Average value		
33	Average values cm	X	
33	Photo of the specimen on page	-	
	Smoke temperature		
34	Maximum value of the averaged values ^o C	x	
35	Time 1) min : s	X	
36	Diagram in appendix Nr.	<u> </u>	

1) Time counting from the start of the test










Baustoffklasse B1 (schwerentflammbare Baustoffe)

According to DIN 4102 part 1 (Mai 1998). This assessment is only valid, if the foils are glued on steel. The surface of the self-adhesive foils may be printed, but not be covered with paints, coatings or similar products. The resistance of the fire behaviour against climatic influences in the outside was not proofed. Therefore the product may be used as schwerentflammbar only inside of buildings or in oth- erwise weather protected areas.

- The material does not produce burning droplets / particles.

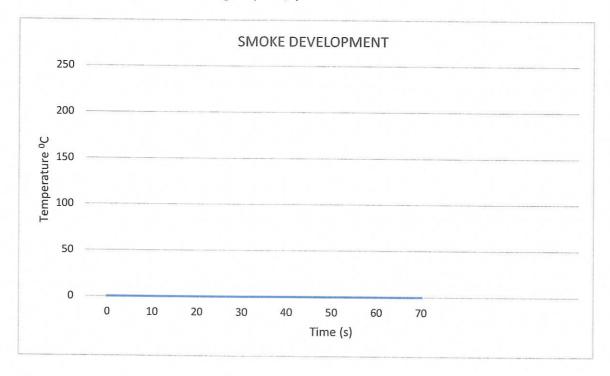






TÜRCERT TEKNİK KONTROL VE BELGELENDİRME A.Ş.



Sample Image

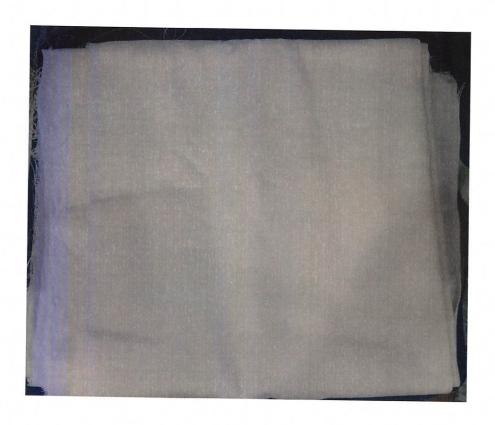

*** End Of Report***

