

TEST REPORT

Job No./Report No TR987033 RV-1

Date:06 April 2017

Page 1 of 7

ADO Goldkante GmbH & Co. KG

Zimmersmühlenweg 14-18 61440 Oberursel/Frankfurt Deutschland

TEL: -

FAX: -

To the attention of Melike Altuna

The following sample(s) was (were) submitted and identified by/on behalf of the client as:

| Sample No. | Sample Description |
|------------|----------------------|
| A | Woven fabric in ecru |

Client's reference No. : TR 987033 RV-1
 Buyer : Not Provided
 Order No. : Not Provided
 Model/Style No. : 1059 PRADO
 Article No. : 1059 PRADO
 Age Grade : Not Provided
 Manufacturer : ADO Goldkante GmbH & Co. KG
 Country of Origin : TURKEY
 Country of Destination : EUROPE
 Shipment Date : Not Provided
 Fiber Composition : Claimed to be 100%POLYESTER
 Fabric Weight : Claimed to be 128 g/m²
 End Use : Not Provided
 Agency : Not Provided
 Sample Receiving Date : 3 August 2016
 Test Performing Period : 3 August 2016 ~ 16 August 2016- 06 April 2017

Submitted Care Label Instructions :



Overall Conclusion

: **See Results**

Test Results

: Please refer to the next page(s).

Performed Test Summary:

Selected test(s) as requested by client against Client's performance standard.

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only."

TEST REPORT

Job No./Report No TR987033 RV-1

Date:06 April 2017

Page 2 of 7

| Test Parameters | Result |
|--|-----------|
| Physical tests | A1 |
| M1(the thickness up to 5 mm soft material) | * |

| | | |
|---------|---|--------------------------------|
| Remarks | : | M = Meets client's requirement |
| | | F = Below client's requirement |
| | | I = Inconclusive |
| | | * = No specified requirement |
| Notes: | Conclusions on meet/fail are based on the test result from the actual sampling of the received sample(s). | |
| | Residual sample can be returned to client if requested. | |

The test results relate to the tested items only.
Test reports without SGS seal and authorised signatures are invalid.
Reported results do not include uncertainties.

Issued in Istanbul
Signed for and on behalf of
SGS Supervise Gözetme Etüd Kontrol Servisleri A.Ş.

**IN THIS REVISED-1 REPORT, ADDRESS INFORMATION ,MODEL NAME ,ARTICLE NO WERE CHANGED BY THE REQUEST OF THE APPLICANT.
THIS REPORT SUPERSEDES OUR REPORT NO: 987033 DATED 16.08.2016**

Tuğba Mert
Customer Services Supervisor

Arzu Yılmaz
Customer Services Team Leader




"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.
Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only."

Test Results:

Conclusion:

Classification: M1

I. Test conducted

This test was conducted according to NF P 92-507:2004 Fire safety-building-interior fitting materials - Classification according to their reaction. And the test methods as following:

1. NF P92-503:1995 Safety against fire Building materials – Reaction to fire tests Electrical burner test used for flexible materials
2. NF P 92-504:1995 Safety against fire – Building materials – Reaction to fire tests – Flame persistence test and speed of the spread of flame.

II. Details of classified product

| | |
|--------------------|--|
| Sample description | WOVEN FABRIC |
| Color | White |
| Density | About 122 g/m ² |
| Specimen size | About 600mm×180mm (NF P92-503:1995) About 460mm×230mm (NF P92-504:1995) |

III. Conditioning

Prior to testing, the sample was conditioned,

In an atmosphere having a temperature of 23±2°C and a relative humidity of 50±5% for 7 days or until constant mass is obtained. The mass is considered as constant when two successive weightings 24 hours apart do not differ by more than 0.1% or 0.1 g (take the highest mass value).

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only."

IV. Test results
i) NF P92-503:1995 Electrical burner test

 Exposed face identification: Face, Orientation: Weft (if applicable)

| During the testing, the following details are noted | Sample 1 | Sample 2 | Sample 3 | Sample 4 |
|---|----------|----------|----------|----------|
| Hole (Yes/No) | Yes | Yes | Yes | Yes |
| Max. afterflame time after withdrawal the pilot flame (s) | 0 | 0 | 0 | 0 |
| Afterglow time (s) | -- | -- | -- | -- |
| Flaming molten droplets (Yes/No) | No | No | No | No |
| Non-flaming molten droplets (Yes/No) | No | No | No | No |
| Flaming debris (Yes/No) | No | No | No | No |
| Non-flaming debris (Yes/No) | No | No | No | No |
| White-hot spots with propagation effects (Yes/No) | No | No | No | No |

| After testing, the following details are noted; | Sample 1 | Sample 2 | Sample 3 | Sample 4 |
|---|----------|----------|----------|----------|
| Max. destruction length from the lower edge (cm) | 17 | 18 | 18 | 47 |
| Average length (cm) | 17.5 | | | |
| Max. width of the destroyed zones between 450mm and 600mm from the test piece lower edge (cm) | ND | ND | ND | ND |
| Average width (cm) | ND | | | |

Remark: "ND" indicates Non-detected.

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only."

ii) NF P 92-504:1995 Flame spread test

| | Specimen 1 | Specimen 2 | Specimen 3 | Specimen 4 |
|--|------------|------------|------------|------------|
| Flame persistence after withdrawal the burner (Yes/No) | No | No | No | No |
| Flame persistence time (seconds) | 0 | 0 | 0 | 0 |
| Flaming molten droplets (Yes/No) | No | No | No | No |
| Non-flaming molten droplets (Yes/No) | No | No | No | No |

Annex I, Requirements

Table 1 Resume of classification for flexible materials which thickness no more than 5mm

| Test Items | Criteria of classification | | | | |
|--|----------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|
| Test for hot melt materials | | Not ignite the wadding | Not ignite the wadding | Ignite the wadding | Ignite the wadding |
| Electrical Burner Test ^{a)} | No drops | Non-flaming molten droplets | Flaming drops or debris | Non-flaming molten droplets | Flaming drops or debris |
| Inflammation ≤ 5s | M1 | M1 | M2 | M4 | M4 |
| Inflammation > 5s and Average destroyed length <350 mm | M2 | M2 | M3 | M4 | M4 |
| Inflammation > 5s and Average destroyed width <90 mm between the 450 mm and 600 mm in length | M3 | M3 | M4 | M4 | M4 |
| Flame Spread Test | | | M4 | M4 | M4 |

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only."

| | | | | |
|--|--|--|--|--|
| (flame spread < 2 mm/s) | | | | |
| ^{a)} If the materials presented a particular behaviour, the classification also need to refer to Table 3. The details of classification M0 refer to clause 3.3 of NF P 92-507:2004. | | | | |

Table 3 Resume of classification for the materials presented a particular behaviour

| Test Items | Criteria of classification | | | | |
|---|----------------------------|--------------------------|-------------------------|--------------------------|-------------------------|
| | | Not ignite the wadding | Not ignite the wadding | Ignite the wadding | Ignite the wadding |
| Test for hot melt materials | | | | | |
| Flame Persistence Test | No drops | Non-flaming molten drops | Flaming drops or debris | Non-flaming molten drops | Flaming drops or debris |
| Flame persistence time ≤ 2s | M1 | M1 | M2 | M4 | M4 |
| Flame persistence time ≤ 5s | M2 | M2 | M3 | M4 | M4 |
| Flame persistence time > 5s and Flame Spread < 2 mm/s | M3 | M3 | M4 | M4 | M4 |

This test had been performed at SGS ANJI laboratory as subcontract.

STATEMENTS:


The test results relate to the behaviour of the test specimens of a product under the particular conditions of the test. They are not intended to be the sole criterion for assessing the potential fire hazard of the product in use.

The test results relate only to the specimens of the product in the form in which were tested. Small differences in the composition or thickness of the product may significantly affect the performance during the test and may therefore invalidate the test results. Care should be taken to ensure that any product, which is supplied or used, is fully represented by the specimens, which were tested.

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only."

Photo Appendix:

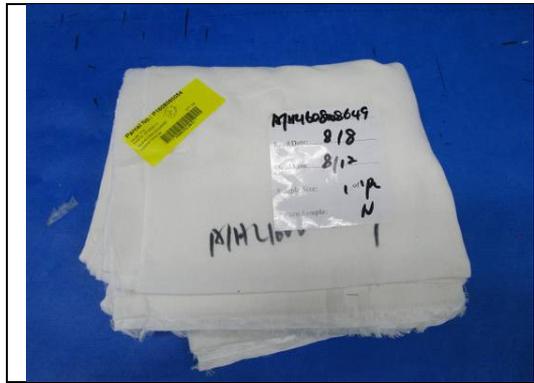

SGS authenticate the photo on original report only

* * * End of Test Report * * *

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only."